


NORTON

SAINT-GOBAIN

clipper[®]

FIERASTRAIE ZIDARIE

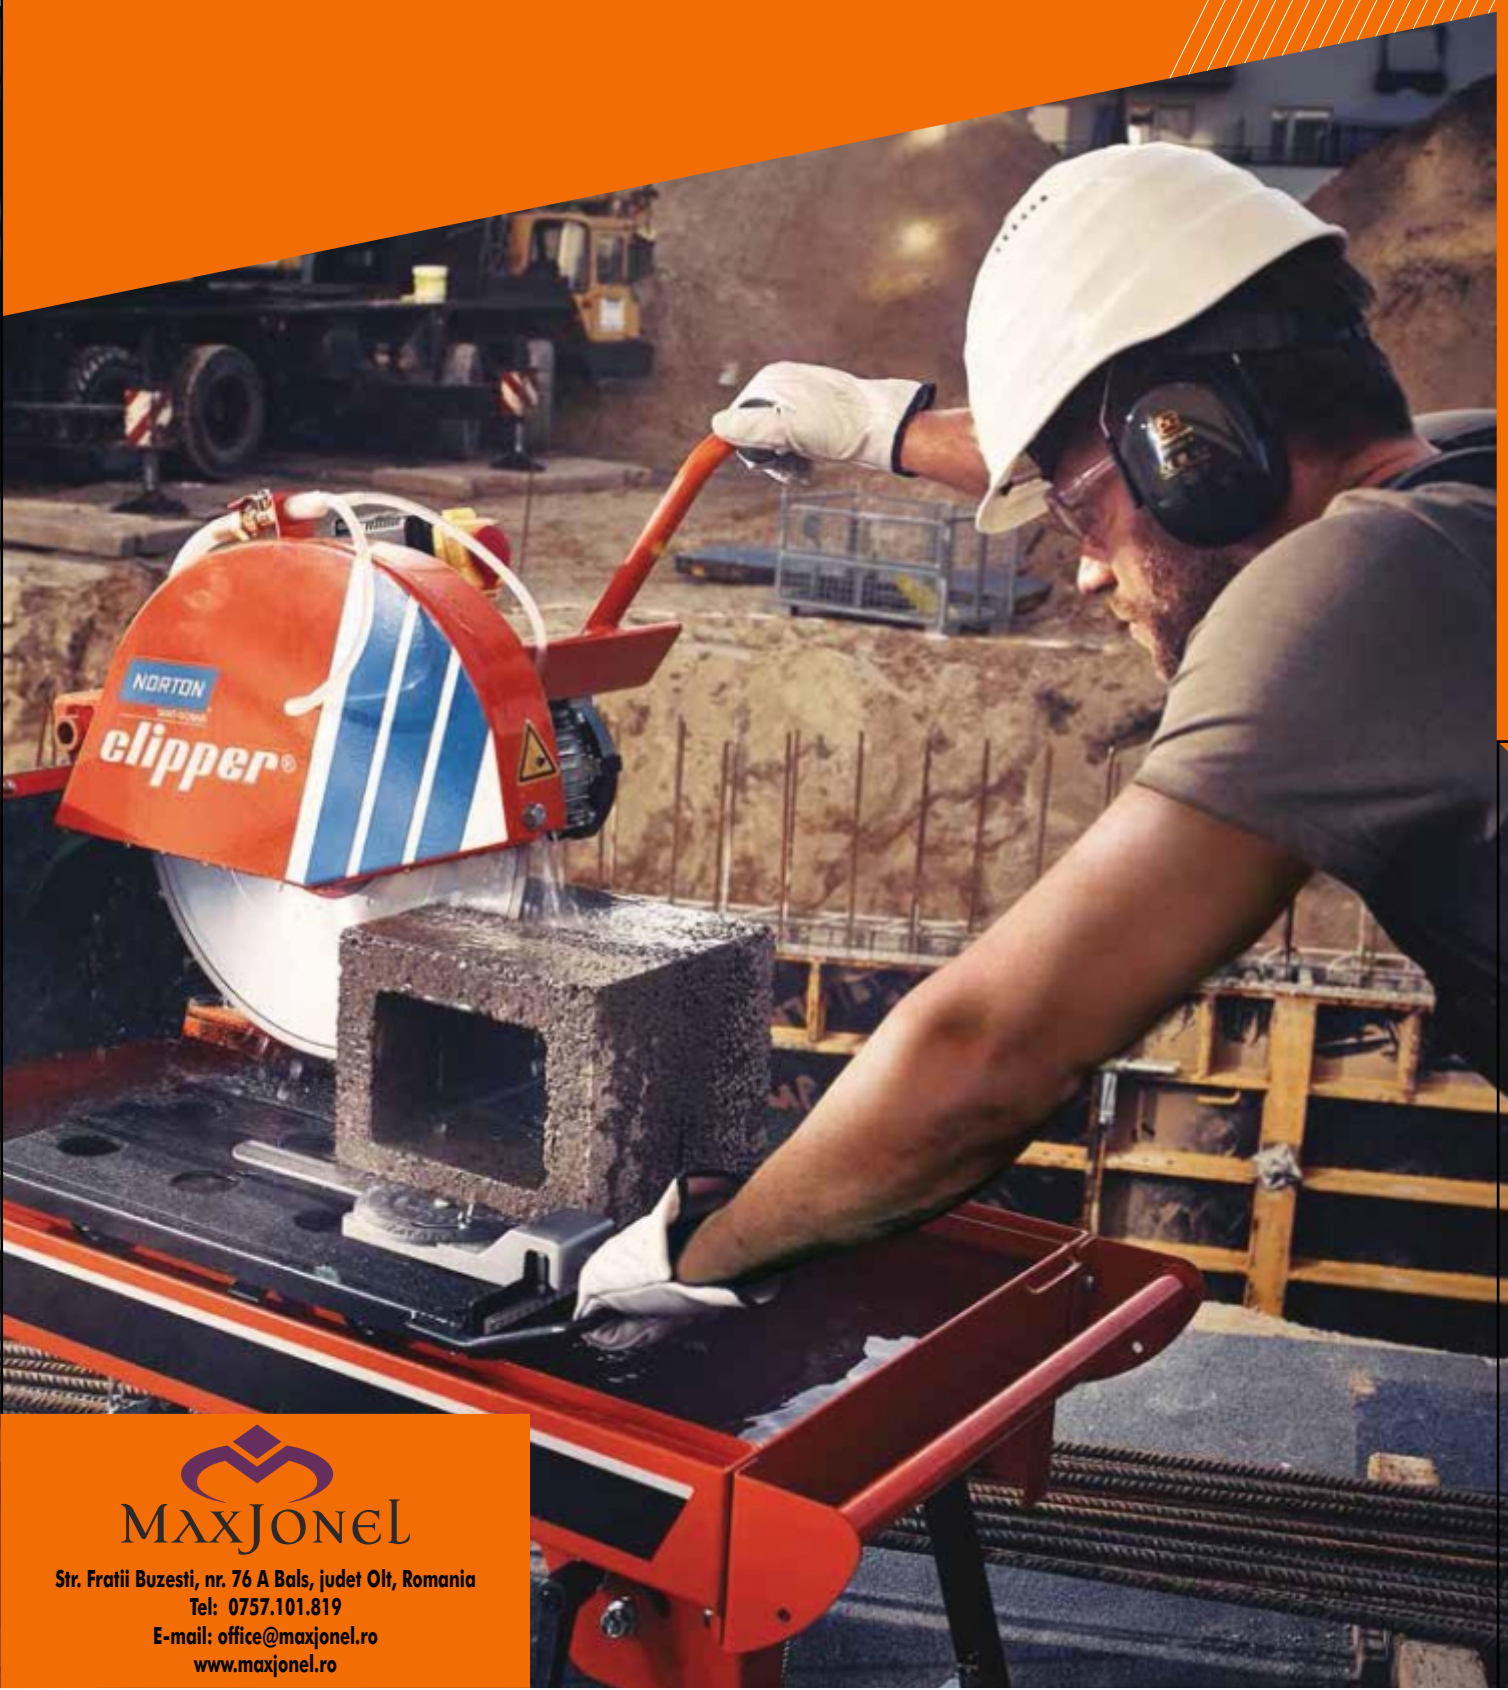

PT



MAXJONEL

Str. Fratii Buzesti, nr. 76 A Bals, judet Olt, Romania

Tel: 0757.101.819

E-mail: office@maxjonel.ro

www.maxjonel.ro

CM501 MAJOR

FACILITATI

- Carucior cu suprafata anti-alunecare
- Acces usor la pompa de apa
- Sine de ridicare dubla
- Reglarea lamei cu manivela

AVANTAJE

- Taiere precisa si stabila
- Intretinere usoara
- Transport simplu si sigur cu stivuior
- Setarea precisa a adancimii lamei



CM501 3,55,3



CM501 3,55,3 D.V.



CM501 3,60.P



CM501 5,55,3

Nr. produs	701846 27018	701846 28233	701846 27020	701846 28232 *
EAN 13 Cod	5450248 371762	5450248 392101	5450248 371779	5450248 392095
Tip motor	Electric	Electric	Benzina - Honda GX200	Electric
Alimentare/ Putere kW	400V / 4kW (5,5 CP)	230-400V~3/4kW (5,5 CP)	4,8kW (6,5 CP)	400V / 4kW / (5,5 CP)
Diametru disc x alezaj (mm)	Ø 500x25,4	Ø 500x25,4	Ø 500x25,4	Ø 600x25,4
Viteza rotatie RPM	1900 min ⁻¹	1900 min ⁻¹	2200 min ⁻¹	1900 min ⁻¹
Adancime max. taiere la 90° / 45° (mm)	195	195	195	245
Lungime max. taiere (mm)	500	500	500	500
Inaltime max. material (mm)	355	355	355	355
Dimensiuni masa (mm)	580 x 420	580 x 420	580 x 420	580 x 420
Vibratii	< 2,5 m/s ²	< 2,5 m/s ²	< 2,5 m/s ²	< 2,5 m/s ²
Nivel sonor / presiune	97dB(A) / 81dB(A)	97dB(A) / 81dB(A)	106dB(A) / 93dB(A)	97dB(A) / 81dB(A)
Dimensiuni (LxWxH) (mm)	1480x610x1550	1480x610x1550	1480x610x1700	1480x610x1550
Greutate	165 kg	163 kg	165 kg	168 kg

* Disponibila doar la comanda


CARACTERISTICI



ADANCIME MAX. TAIERE - Ø500



GHIDAJ TAIERE



ROLE INCLINATE
REZISTENTE LA FRICTIUNE



ADANCIME MAX. TAIERE - Ø600

DISCURI DIAMANTATI RECOMANDATE PENTRU CM501



Substrat / Material	BETON	SILENCIO	UNIVERSAL	REFRACTORY	MULTIMATERIALE
Produs recomandat	PRO BETON	EXTREME UNI SILENCIO	EXTREME UNIVERSAL		PRO 4X4 EXPLORER
Bore (mm)	25,4	25,4	25,4		25,4
Ø500mm Item No.	701846 27064	701846 30309	701846 11440		701846 02097
Ø600mm Item No.	701846 27065	-	-		-